14500-5

TITLE: PUSHBUTTON BOOT

REV. F

14500-5

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED.
2. SILICONE OVERMOLD ALLOWABLE HEX DIM. MUST BE MAINTAINED.

Property of Sensata Technologies

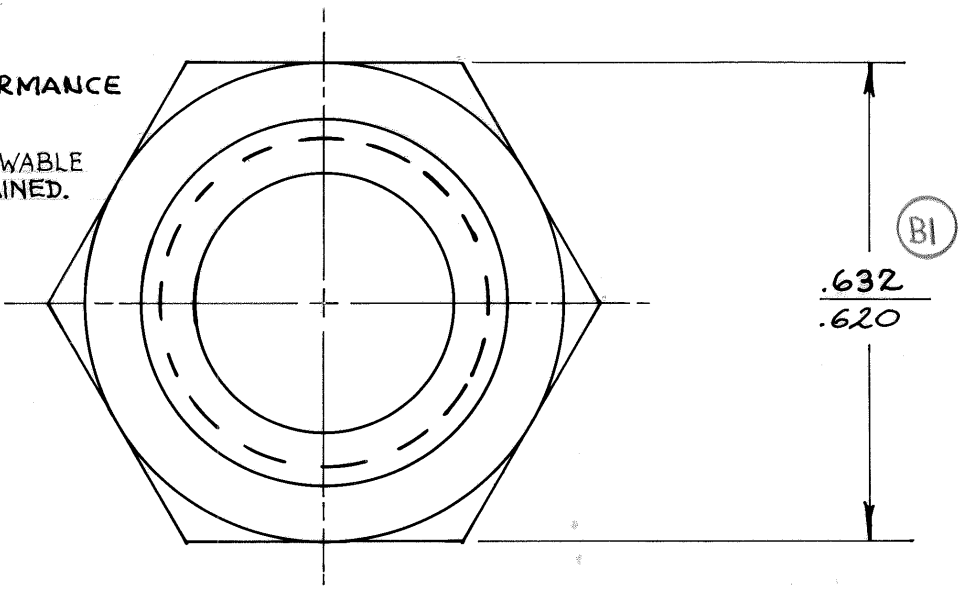

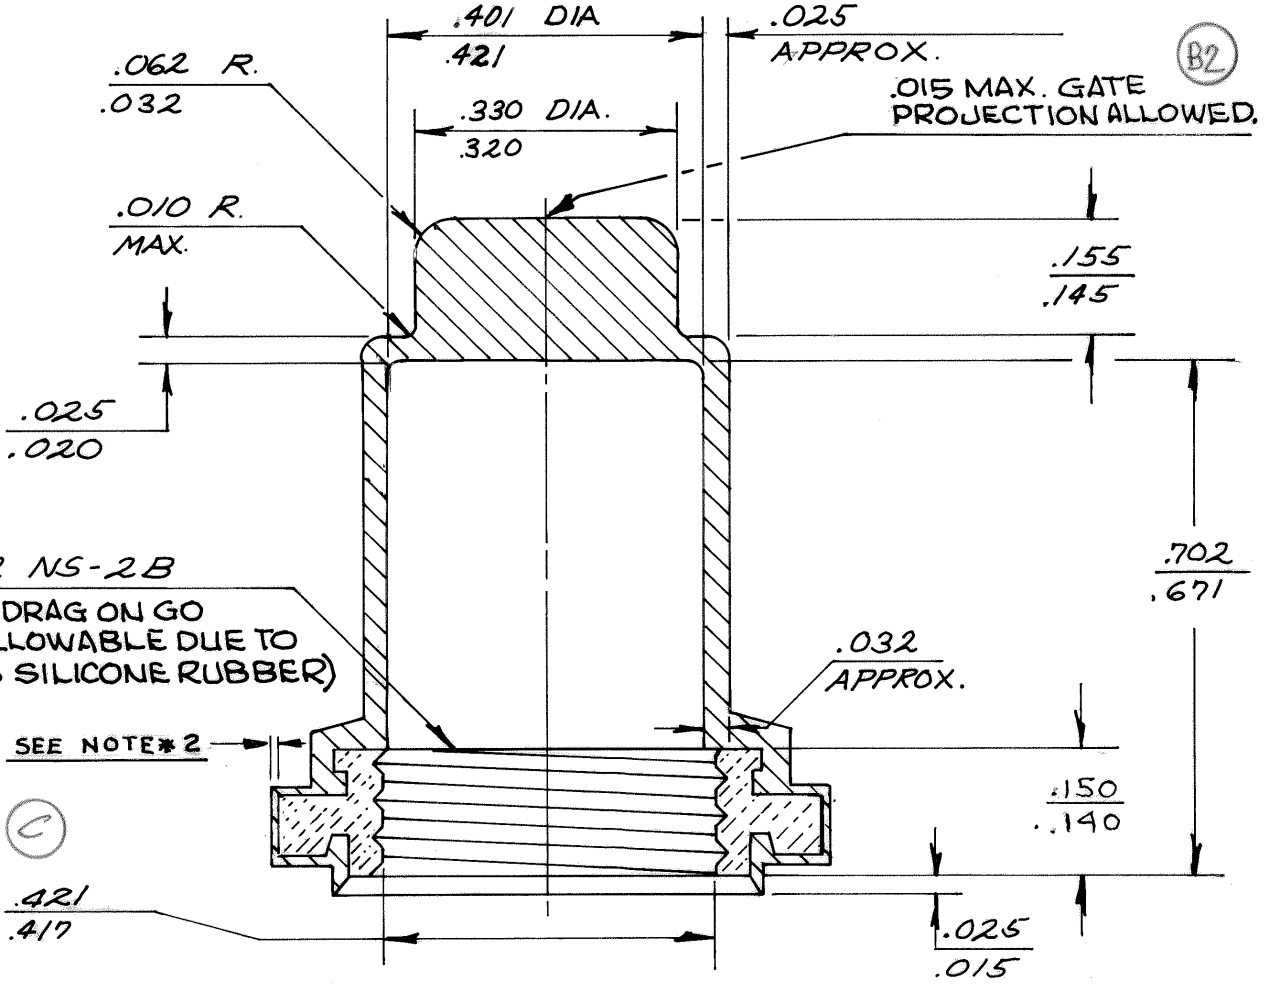

PART NO.	MATERIAL
14500-5	BOOT - SILICONE RUB-R-GLAS PER SPEC. ZZ-R-765 CLASS III, DUROMETER 50-60 NUT - BRASS PER SPEC. QQ 8626, COMP 22. NICKEL PLATE PER SPEC. QQ N290 CLASS II

REV. | Q2-3 | MS-3 | Q1 | M21 | P35 | Q2-1

1 — 1ST ISSUE 7274 CR 77000 10-3-78 JR

A — ADDED HARDNESS SPEC. SE 28513 R 7/31/79

B — SEE C.N. 2-4-83 CR83080 KA

C — DIM'S .417-.421 ... CR83080 2-4-83 KA

D — 1500-140 WAS 1774-168 ADD NOTES 11-2-83 KA CRM15611 CR 11-8-93 SEE CN FOR CHANGES

E — ECN M11742 EJM 4-12-94 KW

F — DIM. .401-.421 WAS .410-.430 CRM16944 EJM 8-17-94 DIM .421-.417 WAS .426-.417 KG

7274

BY J. PARENT 10-3-78

CH. 10-7-78

ENG. 10-6-78

TEXAS INSTRUMENTS INCORPORATED
ATTLEBORO, MASS., U.S.A.

KLIXON® CONTROL PRODUCTS DIVISION

DWG. SIZE A

14500-5

CODE IDENT NO. 82647