
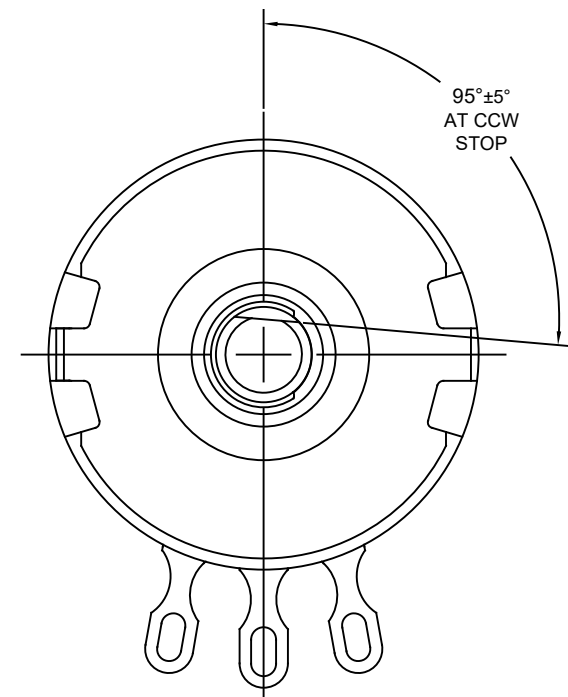


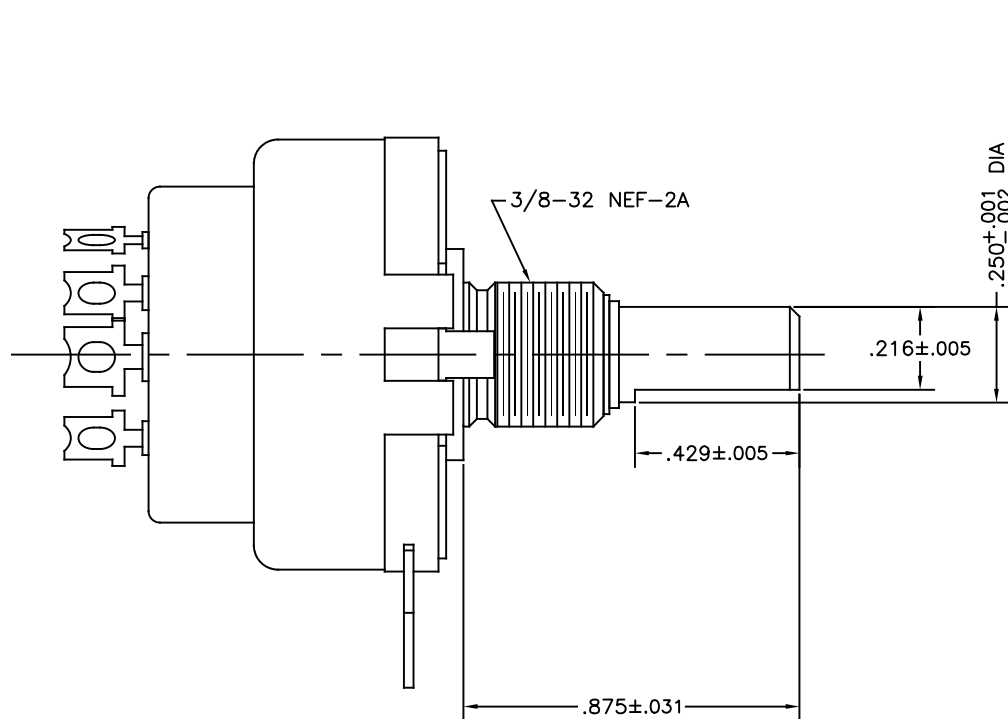

SPECIFICATIONS:

RESISTANCE: $10 \text{ k}\Omega \pm 10\%$
 TAPER: LINEAR
 DESCRIPTION: KS4U1031F28
 POWER RATING: 2 WATTS
 OPERATING VOLTAGE: 500 V SUBJECT TO POWER RATING
 END RESISTANCE: 25Ω MAX
 MECHANICAL ROTATION: 314°

DWG.	K2077	REV. A	PART: POTENTIOMETER	
Changes:			Scale: 2=1	Tolerances on:
Material:			Drawn: A.L.	Decimals $\pm .002$ "
Finish:			Checked: SL	Fractions $\pm .005$ "
Date of Original: May 26/05			Date: 20210630	Angles $\pm .5^\circ$
				Unless Otherwise Specified
 PRECISION ELECTRONIC COMPONENTS LTD. TORONTO CANADA				