
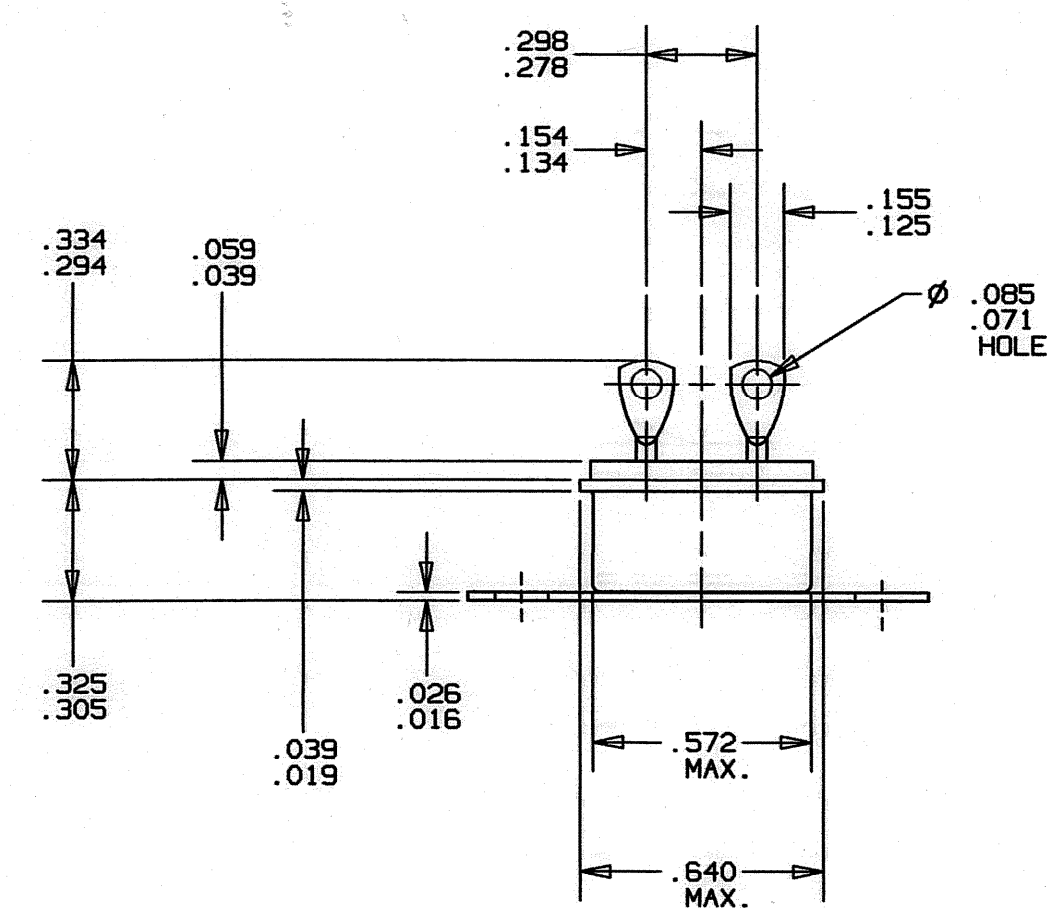


Property of
Sensata Technologies

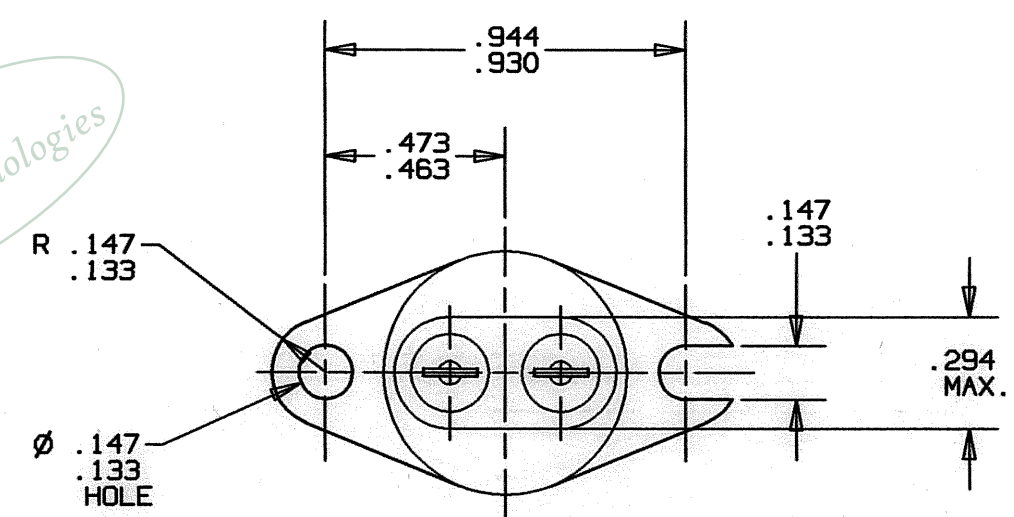

REVISIONS					
ZONE	LTR	DESCRIPTION	PROJ. # 256A	DATE	APPROVED
B-5	C	1: .334/.294 WAS .292 ±.015		4-11-96	S.B.M.
B-4		1: .155/.125 WAS .117/.137			
		2: .085/.071 WAS .078 ±.007			
CRM28333. CFF					


PART NO.: ----- 11041-51*

OPERATING TEMPERATURE:
OPEN: ----- °F. ± °F.
CLOSE: ----- °F. ± °F.

FINISH: -----

WEIGHT: ----- 5.9 GRAMS MAX.

AMBIENT TEMPERATURE
EXPOSURE RANGE: ----- -65°F. TO +450°F.



ELECTRICAL RATING RESISTIVE

30 VAC/DC	125 VAC	250 VAC	LIFE CYCLES
AMPERES			
5.0	2.0	1.0	100,000
5.5	3.0	1.5	50,000
6.0	4.0	2.0	25,000
6.5	5.0	2.5	10,000
7.0	6.0	3.0	5,000

DIELECTRIC STRENGTH
TERMINAL TO CASE: ----- 1250 VOLTS, RMS, 60 CYCLES FOR 1 MINUTE

NOTE: *
FOR ORDERING PRODUCTION QUANTITIES TWO DASH NUMBERS ARE NECESSARY.
THE SECOND DASH NO. WILL BE ASSIGNED WHEN OPERATING CHARACTERISTICS
AND DESIGN DETAILS ARE ESTABLISHED.

SUPERSEDES DWG. 11041-51 REV. "B", DATED 2-7-89

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN J.D. MAYALL	DATE 5-14-62	Q4 P17	
TOLERANCES ON FRACTIONS DECIMALS ANGLES		ENGINEER S.B. MARQUIS	4-11-96	TITLE 11041-51 THERMOSTAT SPST AUTO. RESET SEALED ENVELOPE DRAWING	
MATERIAL		APPROVED		SIZE B	CODE IDENT NO. 82647
		APPROVED		11041-51	
SIGNATURES ON FILE. REFER TO ELECTRONIC CHANGE NOTICE.					