

SPECIFICATIONS

Material: HEXSEALS: Silicone rubber conforms to A-A-59588 Class III, GR 60 unless otherwise specified.

Mounting Nut: HEXSEALS: Brass, nickel-plated (unless otherwise noted)

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external.


Operational Life: 50,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

Agency Recognition: E-SEELS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.


Installation: If a reducing adaptor is required - see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

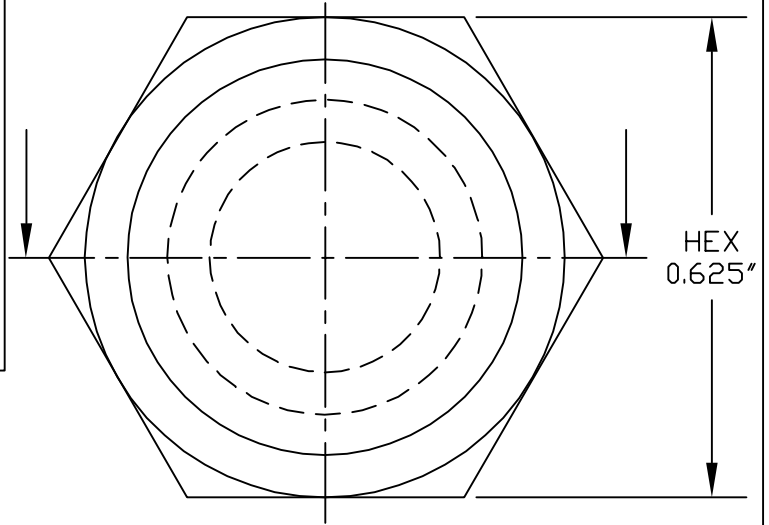

MONEL MESH
PER QQ-N-281 CLASS A
FOR EMI/RFI SUPPRESSION

PERMISSIBLE RUBBER
OVERLAY 0.005MAX.

1/2-32NS-2B

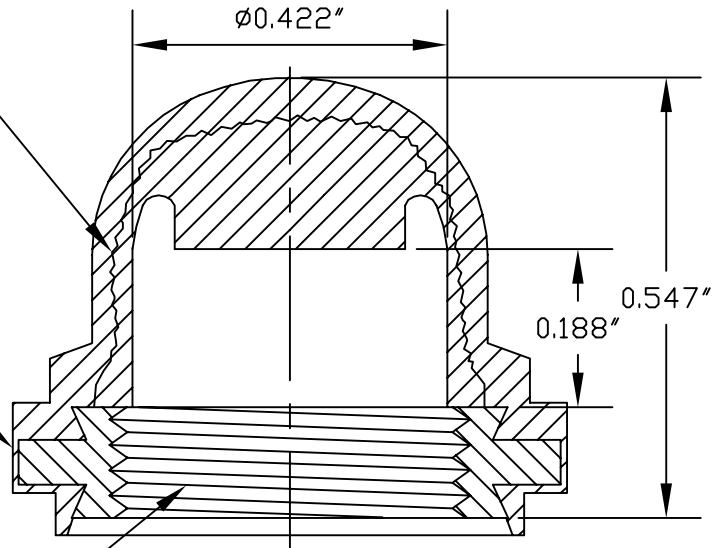

REV.	DESCRIPTION	DATE
C	MAT'L CHANGED	08.03.09
B	CAD COMPUTER GENERATED	09.23.02
A	UPDATED and REDRAWN	09.12.76
ENG.	S. GOK	08.03.09
DWN.	R.C.	07.22.74
CHKD.	J. CELLA	08.03.09
SCALE 4 : 1		DWG. NO. NH3030SRFI
FINISH: GRAY		HEXSEAL®

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.