MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3–245
CK–C4500

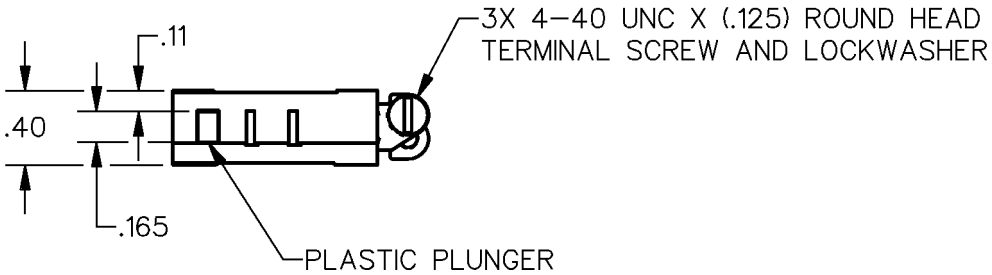

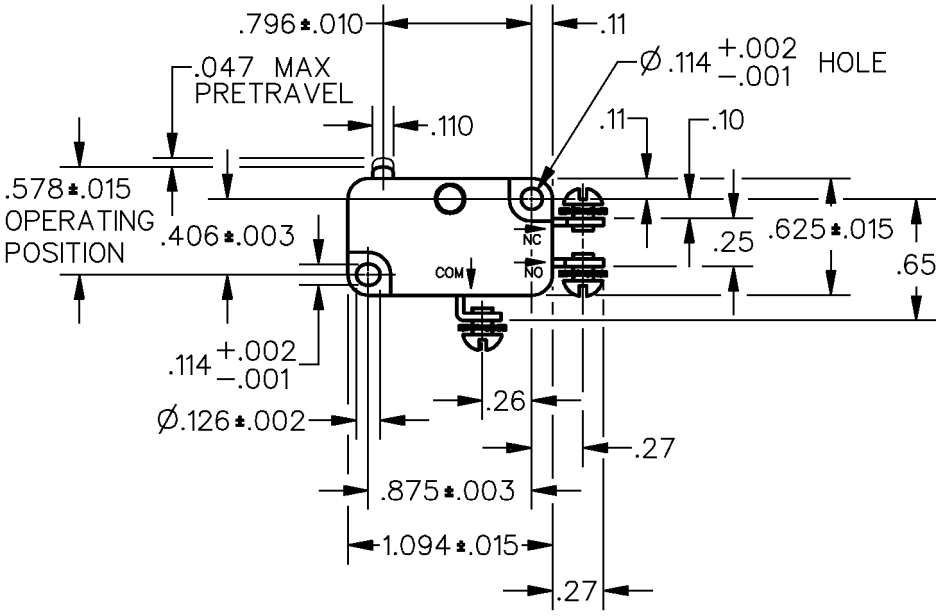

NOTE
1 – SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 400°F FOR 100 HOURS

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL / DO NOT SCALE PRINT
OPERATING FORCE — — — — 10–25 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE — — — — — 6 OZ MIN		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .006–.016	L118	TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — .040 MIN	10A 1/8 HP 125 OR 250 VAC	THREE PLACE (.000) ±.005
FREE POSITION — — — — .625 MAX		ANGLES ±
RELEASE TRAVEL — — — — .007 MIN		WEIGHT .017 LB

CATALOG LISTING V3–245 PAGE 1 OF 1
ISSUE 12
REPLACES
RELEASE NO.
CHECK
CHECK
CHECK
CHECK

REVISIONS
A OBS CO82209 CSL 18 OCT 96
B RE–INST PR22527 DCS 7 JAN 97

DDM/CAD
DRAWN DCS 7 JAN 97