
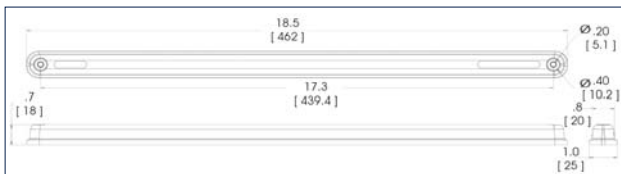
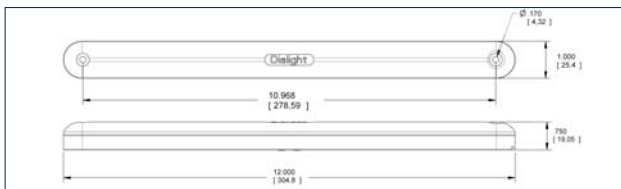


## LED Vehicle Strip Light

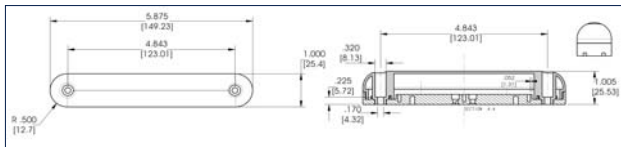

### Application:

Dialight's Vehicle Strip Light is a high intensity lighting application designed for doorways, engine compartments, and multiple other locations where intense lighting is needed within a sleek design.

### Electrical specifications

Connection: 18AWG lead wire from rear of housing

Operating Temp: -40°C to +55°C

### Storage Temperature

Standard Lens: -40°C to +120°C

High Temperature Lens: -40°C to +149°C

Compatible with Automotive DC power supplies

### Material

Base: Anodized Aluminum

### Lens:

Standard: Polycarbonate UL 94 flammability rating

High Temperature Lens: Polysulfone

All values typical unless otherwise stated

### Features & Benefits

- Low power consumption
- Long life
- IP 66 Rating
- Shatterproof diffused lens
- Wide angle uniform beam
- Robust design
- Shock and vibration resistant
- Suitable for both indoor and outdoor applications
- Saves money - reduces maintenance cost

Part Number	Usage	Lumens	Color	CCT	Base Color	Lens Color	Voltage	Current (Typ)
18.5"								
VSL-CC-17B-35-802	High Intensity	500	Cool White	6500K	Black	High Temp Clear	10-30V	890 mA @ 12V DC 315 mA @ 28V DC
VSL-CC-17B-35-806	High Intensity	500				High Temp Clear		
VSL-CC-17B-35-811	Engine Compartment	500				High Temp Clear		
VSL-CC-37B-35-809	High Intensity	500				High Temp Clear		
VSL-CC-37B-35-810	Engine Compartment					High Temp Clear		
12"								
VSL-CC-16B-35-801	Wheelchair Light	350	Cool White	6500K	Black	High Temp Textured	10-30V	230mA @ 24V DC
VSL-CC-16B-35-802	Back-up Strip Light					High Temp Clear		
VSL-CC-16B-35-803	Engine Compartment					High Temp Clear		
VSL-RR-16B-35-801	CHMSL	250	Red	N/A		Red		
6"								
VSL-CC-15B-35-801	High Intensity	125	Cool White	6500K	Black	High Temp Clear	10-30V	135mA @ 24V DC
VSL-CC-15M-35-803		125			Aluminum	High Temp Clear		
VSL-CC-15B-35-805		120			Black	Diffused		
VSL-CC-15B-35-802		200			Black	High Temp Clear		
VSL-CC-15M-35-804					Aluminum	High Temp Clear		
VSL-CC-15B-35-813	Engine Compartment	150	Amber	N/A	Black	High Temp Clear	12V	390 mA @ 12V DC

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [http://www.dialight.com/Assets/Brochures\\_And\\_Catalogs/Signaling/MDTBVSLX001.pdf](http://www.dialight.com/Assets/Brochures_And_Catalogs/Signaling/MDTBVSLX001.pdf). Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT.