


HONEYWELL
PART NUMBER

702PB121

REV	DOCUMENT	CHANGED BY	CHECK
B	0051698	MBN 29APR09	CMH

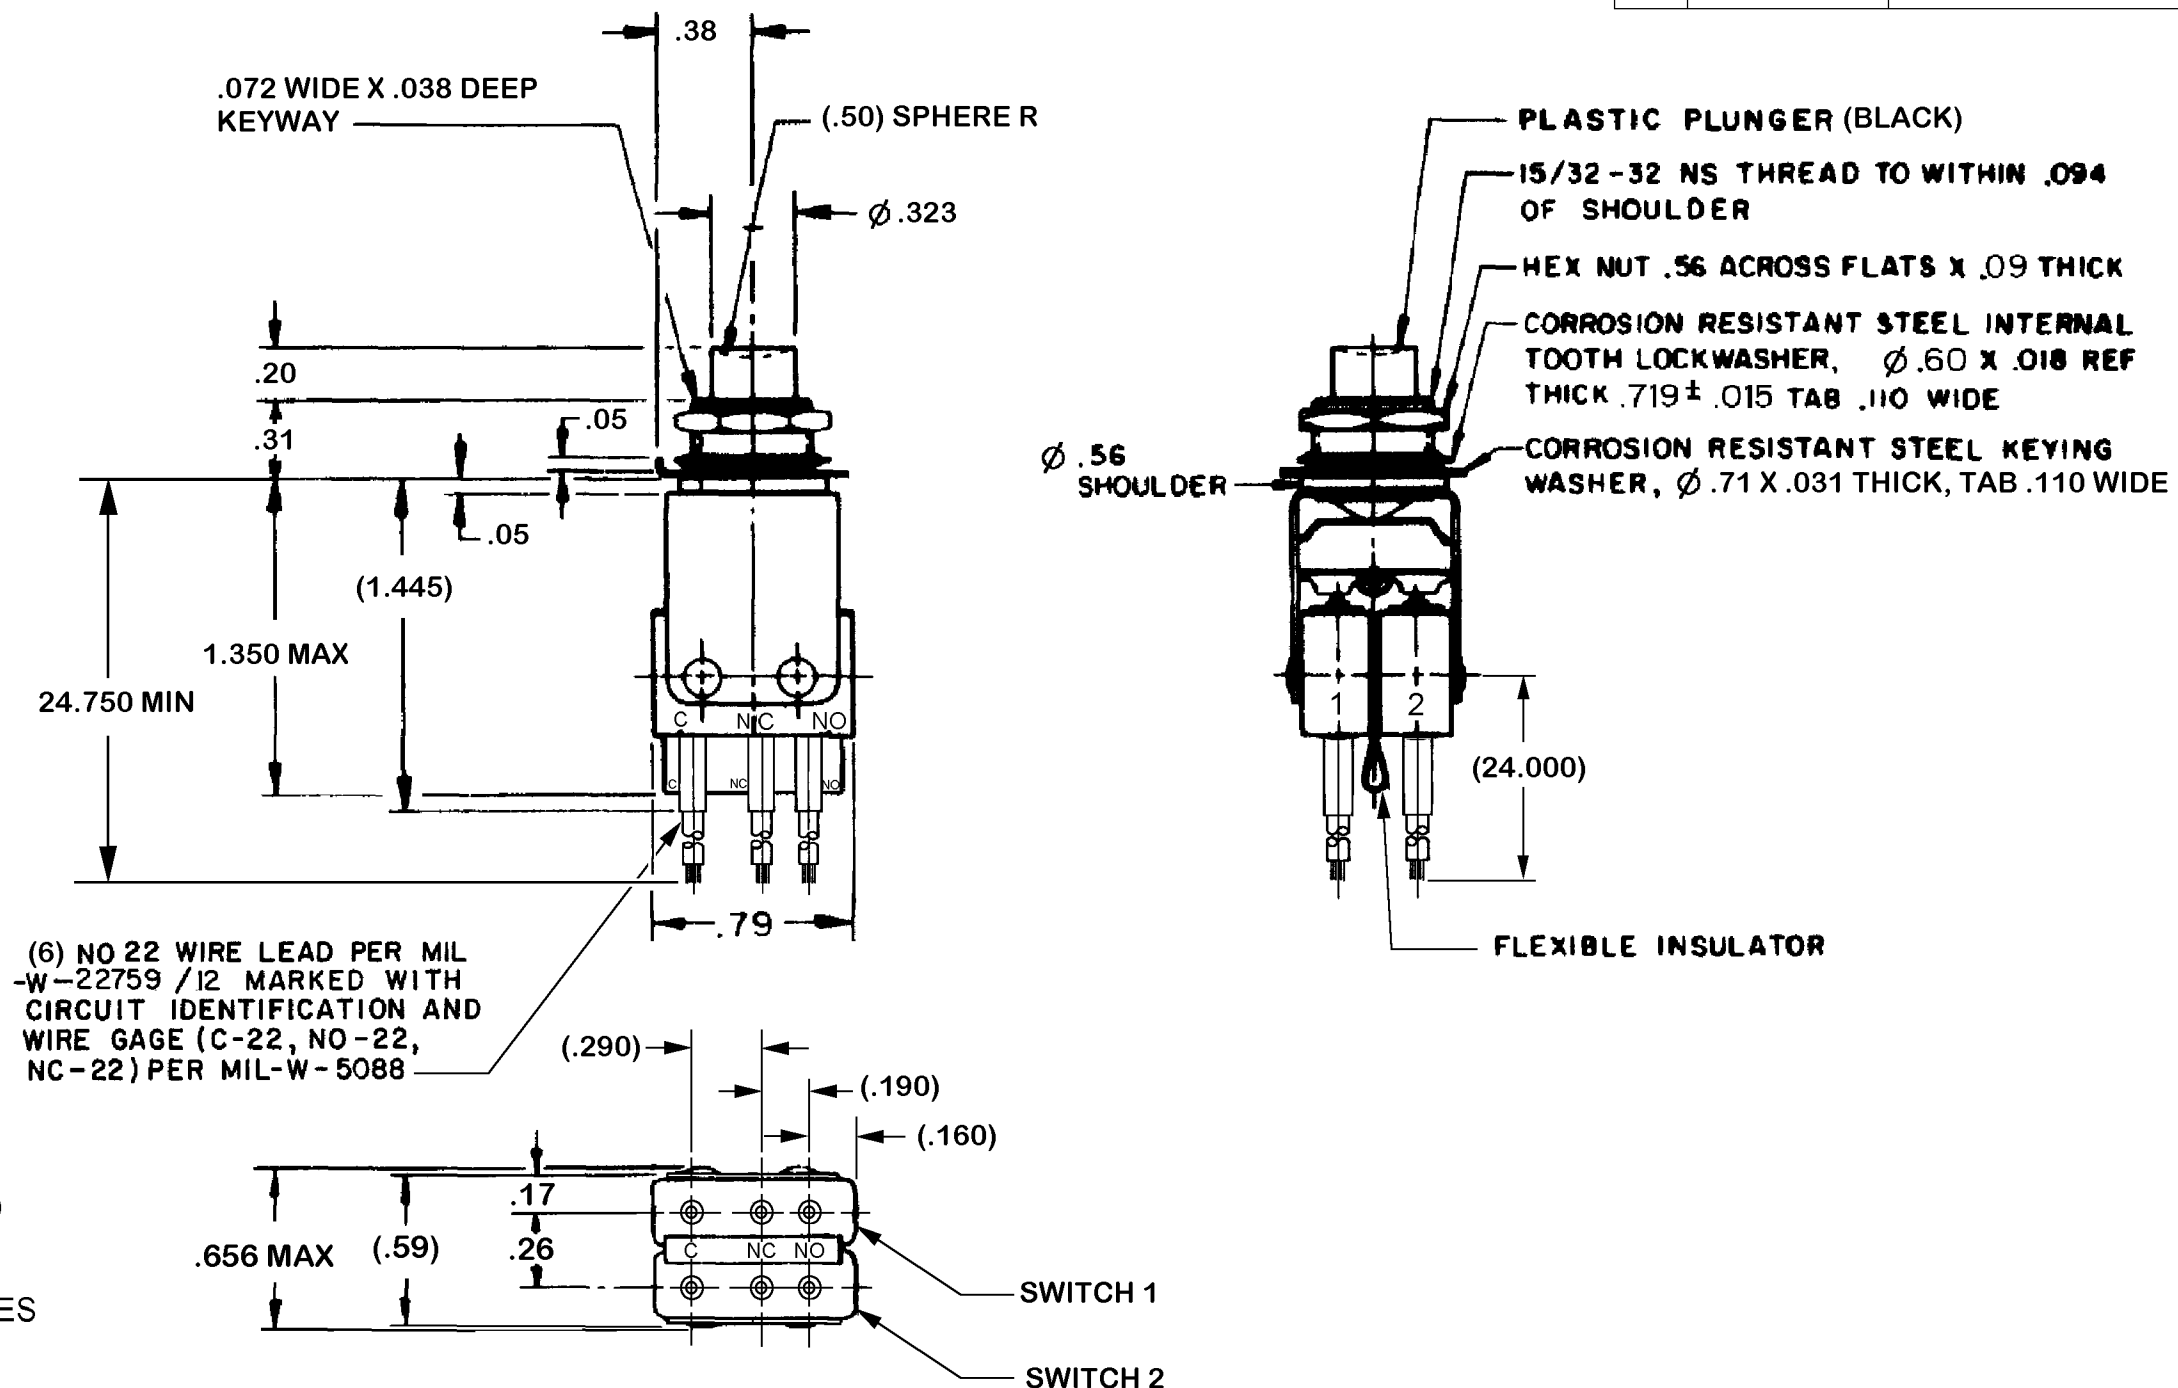

NOTES:

- 1 - UNIT INCLUDES "HM" TYPE BASIC SWITCHES (2)
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - SWITCH NUMBERS MARKED ON BASIC SWITCHES

CHARACTERISTICS

OPERATING FORCE	----- 30 OZ APPROX
TOTAL TRAVEL	----- .100 APPROX

ELECTRICAL DATA


CONTACT ARRANGEMENT
SPDT (2)

LOAD	115 V 400 CYCLES	28 VDC
RESISTIVE	2.5 AMP	4 AMP
INDUCTIVE	2.5 AMP	2 AMP

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACES	X	\pm	0.400
ONE PLACE	.X	\pm	0.03
TWO PLACE	.XX	\pm	0.015
THREE PLACE	.XXX	\pm	0.005
ANGLES	X	\pm	3.0°

THIRD ANGLE PROJECTION



DRAWN	SPK	29JUL08
CHECK	KRB	29JUL08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

PUSH BUTTON SWITCH

SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
B	I	-	702PB121	B
SCALE	NONE	WEIGHT: .070 LB MAX	SHEET	1 OF 1