

BURNDY® Products FCI

Compression


TYPE YBM

HYLUG™

FLAG-TYPE RING-TONGUE TERMINALS

B-18

Made of pure electrolytic copper for maximum conductivity and ductility. Seamless extrusion tin plated to resist corrosion.

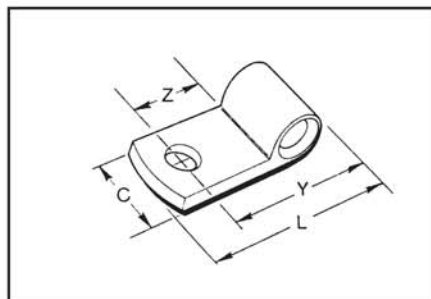

CATALOG* NUMBER	WIRE RANGE		STUD SIZE	DIMENSIONS IN INCHES				HYTOOL	**INSTALLATION TOOLING HYPRESS Y29NC & Y29B		WIRE STRIP LENGTH	
	Flex	Code		C	Z MIN.	Y MAX.	L MAX.		NEST	INDENTOR		
YBM8C	8	8	8-10	0.44	0.34	0.77	1.01	MY28	DV8B	Y29PBL-4	7/16"	
YBM8C-T2	Class I, K, DLO (37/24)		1/4	0.50	0.37	0.80	1.07				1/2"	
YBM8CT4	MIL-W-5086		3/8	0.62	0.52	0.83	1.35				9/16"	
YBM6C-L9	6	6	8-10	0.50	0.37	0.85	1.09		DV6BL		Y29PBL-4	1/2"
YBM6C-L	Class I,		1/4	0.50	0.37	0.85	1.12					9/16"
YBM6C-L2	DLO (81/24)		5/16	0.56	0.43	0.91	1.21					5/8"
YBM6C-L3	5086 MIL		3/8	0.62	0.52	0.88	1.21					
YBM4C-L4	4	4	8-10	0.50	0.37	0.99	1.18		DV4BL	Y29PBL	1/2"	
YBM4C-L	Class I,		1/4	0.50	0.37	0.94	1.21				9/16"	
YBM4C-L1	DLO (105/24)		5/16	0.56	0.43	1.00	1.30				5/8"	
YBM4C-L2	MIL-W-5086		3/8	0.62	0.52	0.97	1.30					
YBM2C-L1	2	2	1/4	0.62	0.37	1.01	1.29		MY28	DV2BL	Y29PL	5/8"
YBM2C-L2	Class I,		5/16	0.62	0.43	1.07	1.38	1"				
YBM2C-L	DLO (150/24) MIL-W-5086		3/8	0.62	0.37	1.01	1.35					
YBM1C-L3	1	1	1/2	0.88	0.71	1.29	1.74	DV1BL		Y29PR	5/8"	
YBM1C-L	Class I, DLO (225/24) MIL-W-5086		3/8	0.62	0.50	1.19	1.53				3/4"	
YBM25-L1	1/0	—	1/4	0.69	0.52	1.19	1.83	MY28		DV25BL-1	Y29PR	13/16"
YBM25-L2	Class I, DLO (275/24)		5/16	0.69	0.46	1.25	1.56		1"			
YBM25-L	MIL-W-5086		3/8	0.69	0.58	1.26	1.59					
YBM26-L	2/0	—	3/8	0.81	0.51	1.37	1.72	MY28	DV26L	Y29PR	1"	
YBM27-L	Class I, DLO (325/24) MIL-W-5086		3/8	.95	.46	1.42	1.72					
YBM27-L1	3/0	—	3/8	.83	.43	1.37	1.75	MY28	DV27L	Y29PR	1"	
YBM28-1/4	Class I, DLO (450/24) MIL-W-5086		1/4	.95	.72	1.66	2.09					
	4/0	—	1/4	.95	.72	1.66	2.09	MY28	DV28L	Y29PR	1"	

* Lead Plated available, contact factory.

** See top illustration for recommended connector insertion into tools.